

Hardware Enforced Security



Features

- One-way-only data flow
- Gigabit Ethernet port to secure (Secure) network
- Dual Gigabit Ethernet ports to public (Unsecure) network
- 1U rack mountable or table-top design
- FIPS-140-3 Certified

The Sunhillo SureSentry™ Data Diode is designed to protect the integrity of a secure network by strictly enforcing a one-way-only flow of data from a secure network to an unsecure public network. SureSentry accomplishes this by implementing a 100% hardware-enforced security protocol that cannot be disabled or bypassed.

Securely connecting multiple networks with different security classifications is a critical cyber security issue for the Air Traffic Control, Defense and Industrial Sectors. SureSentry addresses that issue.

FEATURES:

Gigabit Ethernet port to secure (Secure) network. The SureSentry Data Diode receives IP data from the secure network for forwarding to the public network. The secure network communicates with a

fully compliant IP proxy that in turn forwards one-way UDP packets to the public side of the Data Diode. With no logical or electrical receive path on the Secure side UDP interface, malicious packets can't make their way to the secure network.

Dual Gigabit Ethernet ports to public (Unsecure) network.

SureSentry can forward IP data from the secure network to the public unsecure network(s). In a mirror configuration of the Secure side, the public network communicates with a fully compliant IP proxy that receives one-way UDP packets from the secure side of the Data Diode. With the hardware enforced security through the data diode, the unsecure data has no way to reach the secure network.

SureSentry uses Sunhillo's FIPS 140-3 certified cryptographic library to provide validated

cryptography for the protection of sensitive information where encryption is used (i.e., https, ssh).

HARDWARE:


Sunhillo's SureSentry Data Diode features a compact 1U enclosure. The front panel provides dual RJ45 Ethernet ports. These connections support standard 10/100/1000 Ethernet cables, which provides an interface to a LAN's switch, router, or hub. In most applications, the Unsecure side LAN connections are to the public LAN(s).

The secure side Ethernet port connection is located in the center of the rear panel. This connection supports a standard 10/100/1000 Ethernet cable, which provides an interface to a LAN's switch, router, or hub. In most applications, the Secure side LAN connection is to the user's private LAN.

Front and Rear Panels



SureSentry™ Data Diode Architecture

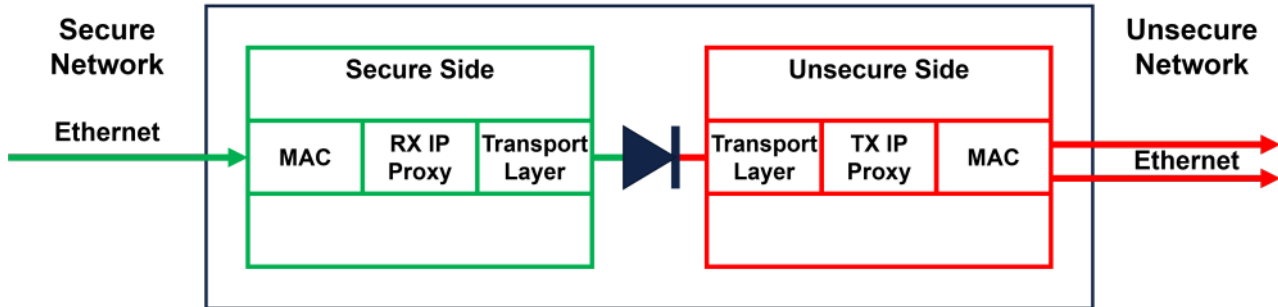

Technical Specifications

SureSentry™ Data Diode

- Hardware enforced cybersecurity
- Maximum throughput: 70 Mbps based on 6000 pps with 1436 byte payload
- Maximum throughput: 10 Mbps based on 10,000 pps with 100 byte payload

Ethernet

- (1) 10/100/1000BASE-T connection to Secure Side/Private Network
- (2) 10/100/1000BASE-T connections to Unsecure Side/Public Network

Protocols

- UDP/IP

Power

- 100-240VAC, 50-60 Hz, 0.65-0.35A
- 12W Max

Optional Rackmount Sleeve Kit (P/N 010-U-RMS)

- 1U rackmount for standard 19-inch racks
- Captive fasteners allow for fast removal and replacement
- Rackmount sleeve has space for up to two Data Diodes

Dimensions

Single SureSentry:

- Height: 1.61 in / 41 mm
- Width: 7.31 in / 185.68 mm
- Depth: 9.17 in / 233 mm

Populated 1U Sleeve:

- Height: 1.75 in / 44.45 mm
- Width: 17 in / 431.8 mm
- Depth: 9.25 in / 234.95 mm

Weight (unpackaged)

- Single Data Diode: 3 lbs / 1.36 kg
- Empty Sleeve: 3 lbs / 1.36 kg
- Fully Populated Sleeve: 9 lbs / 4.08 kg

Environmental (Tested to MIL-STD-810G)

- Storage Temperature: -50°C to +60°C
- Operating Temperature: 0°C to +50°C
- Operating Relative Humidity Range: 10-95%, noncondensing
- Operating Altitude: -300 ft to 10,000 ft

MTBF

- 1,667,576 hours at 30°C

Certifications and Compliance

- CE Mark
- UKCA Mark
- RoHS3 Directive EU 2015/863
- REACH
- FCC Part 15, Class B
- IEC/EN/UL/CSA 62368-1
- ETL for Canada and US, 3023031
- FAA-G-2100J: Power
- FIPS-140-3

